

- NOTES:**
1. All resistors 1/4 watt, 10%, except as noted.
  2. All capacitors in uF, except as noted.
  3. Symbols used -
    - ⊖ - chassis ground
    - ⊥ - p.c. board ground
    - ⊞ - shielded component
    - \* - variable

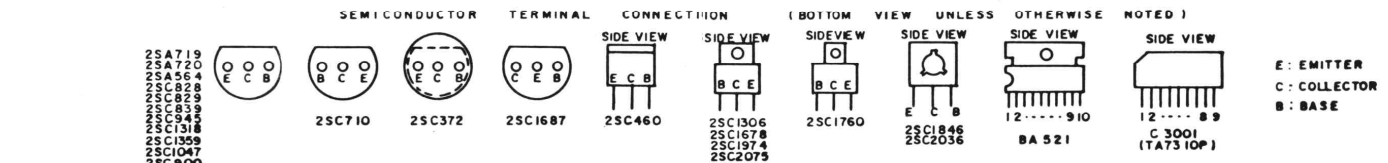



Figure 4-7. Schematic Diagram, Model 2702