


SCHEMATIC DIAGRAM

VOLTAGE CHART

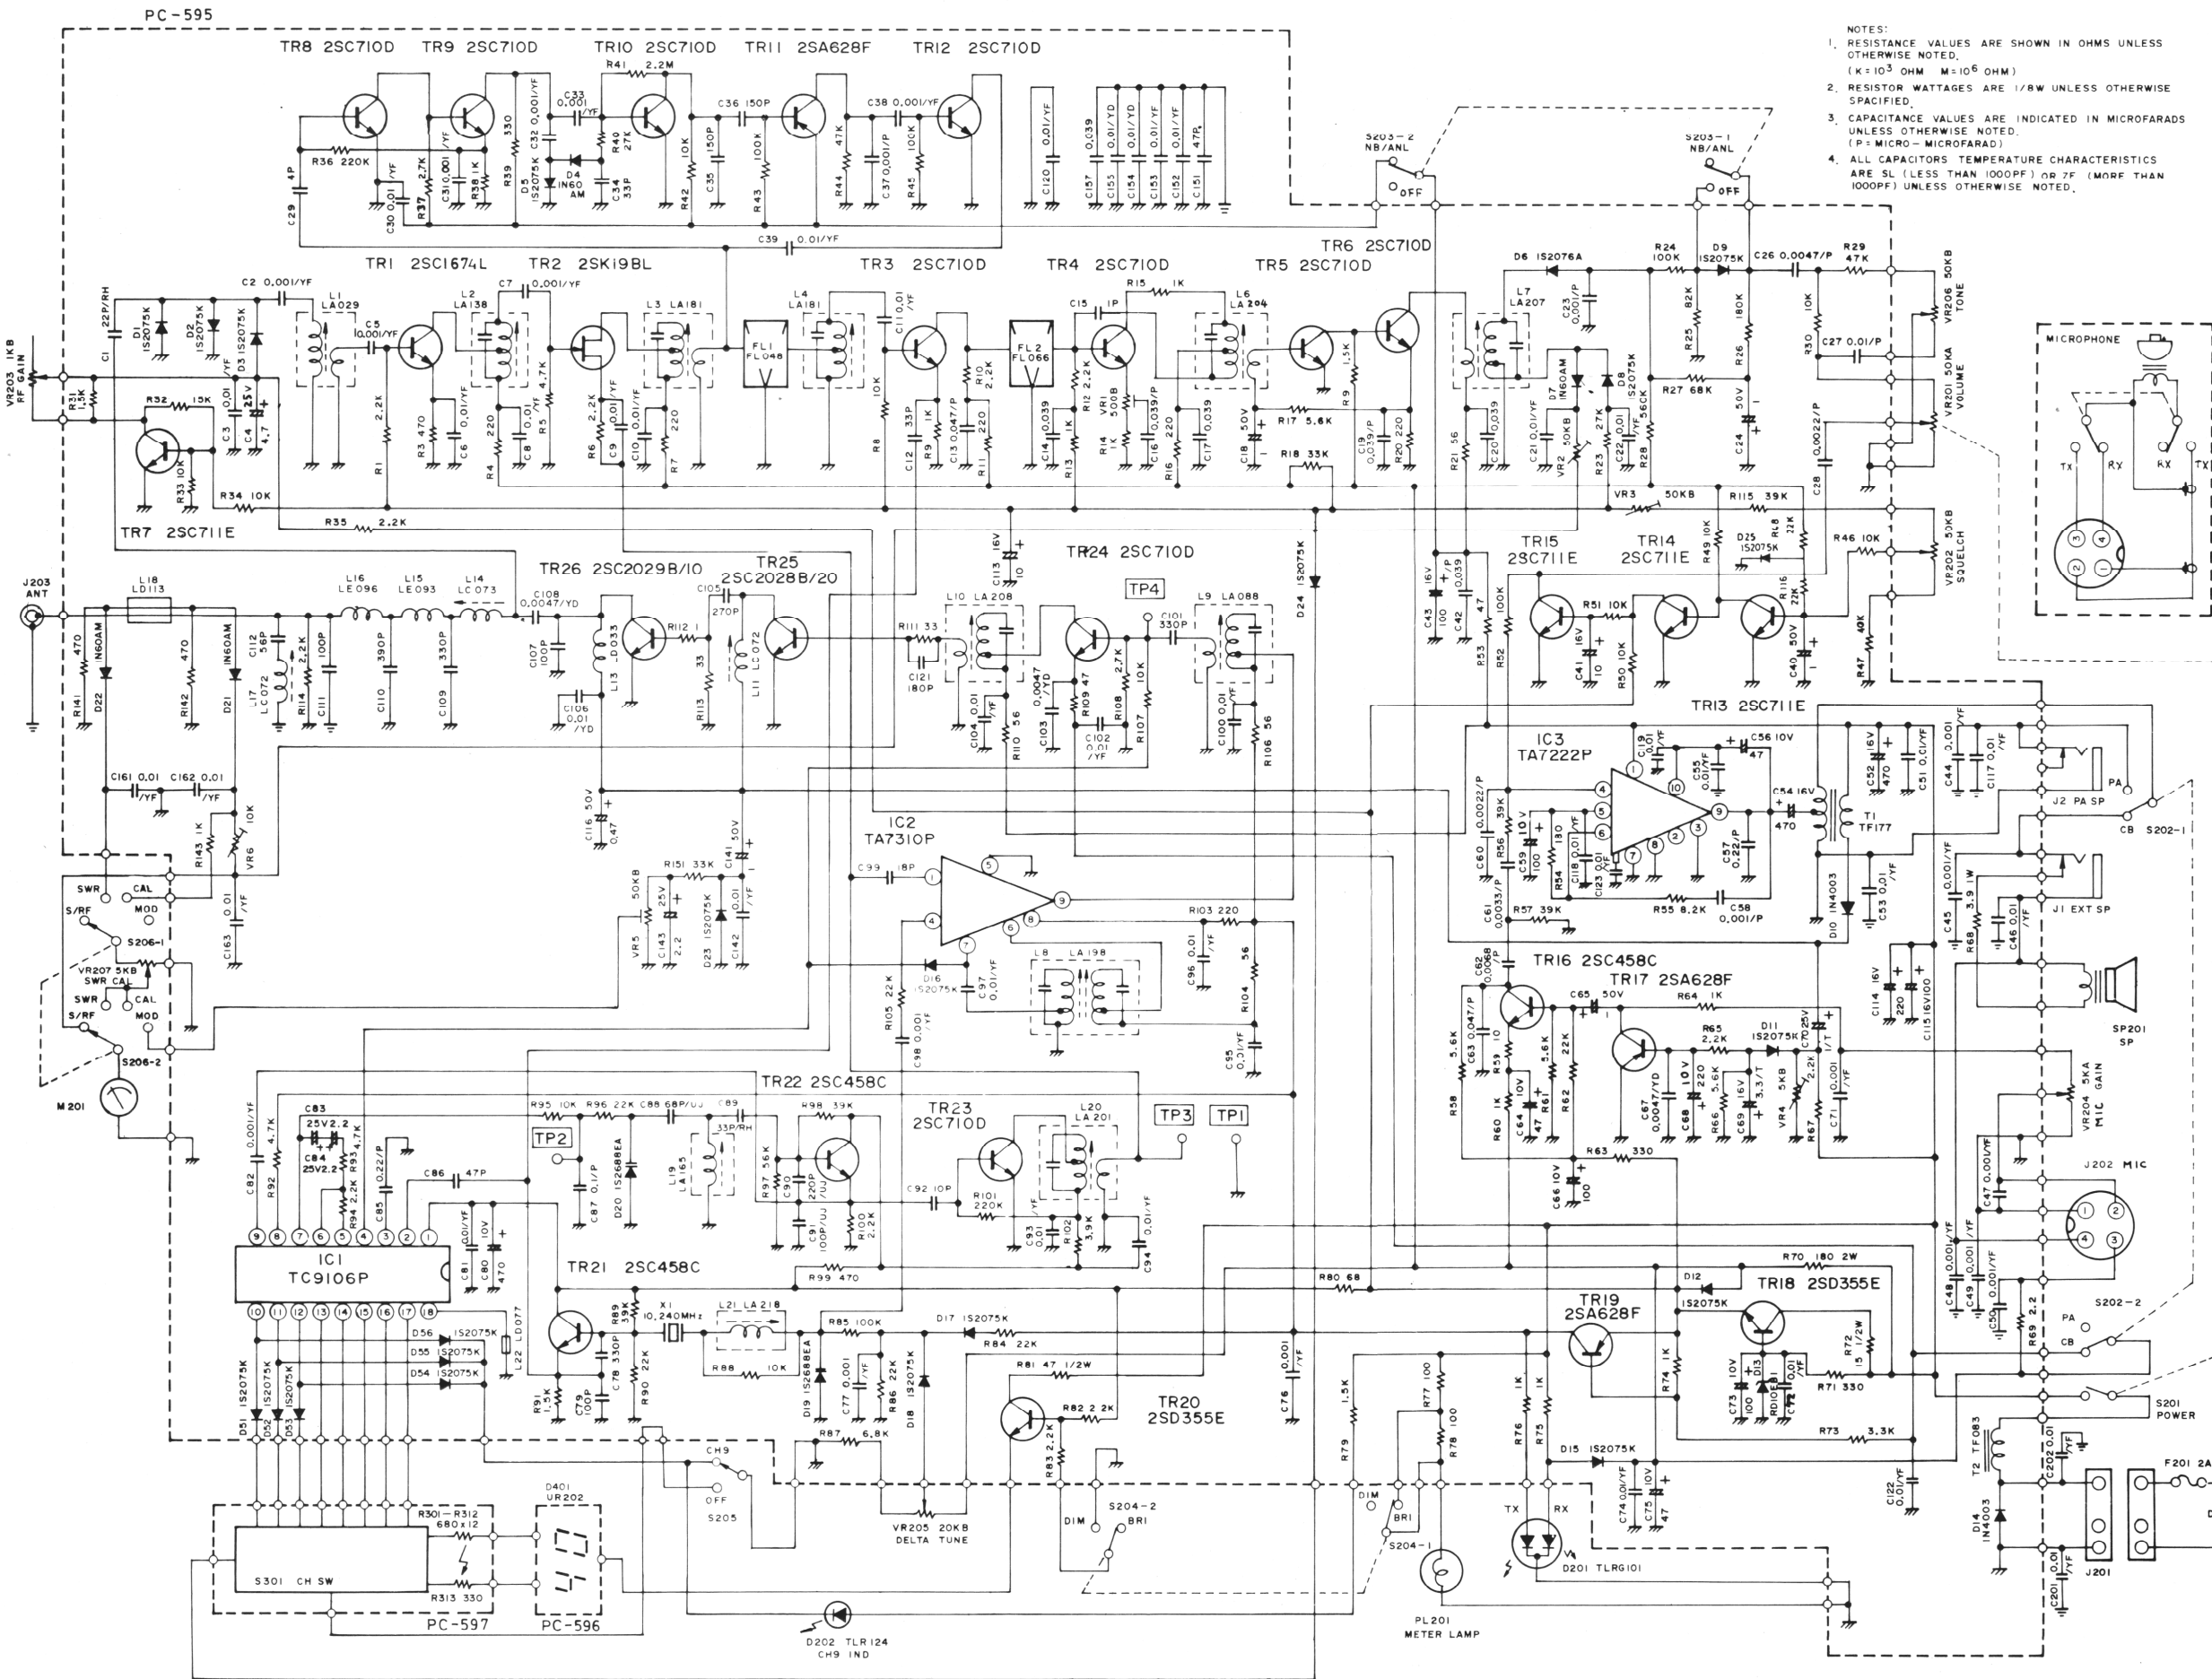

	(RX)			(TX)		
	E	B	C	E	B	C
TR1 (SQ) (UNSQ)	1.02 1.09	1.77 1.83	9.08 9.04	0	.04	.29
TR2 (FET)	2.90 (SOURCE)	0 (GATE)	9.26 (DRAIN)	.25 (SOURCE)	0 (GATE)	.26 (DRAIN)
TR3 (SQ) (UNSQ)	1.32 1.38	1.69 1.76	.04 .02	.03	.07	.03
TR4 (SQ) (UNSQ)	1.12 1.19	1.70 1.77	8.70 8.64	0	.04	.29
TR5	0	.70	1.61	0	0	.29
TR6	.93	1.61	13.87	0	.29	13.96
TR7	0	.64	.11	0	0	.08
TR8	0	0	0	0	0	0
TR9	0	0	0	0	0	0
TR10	0	0	.01	0	.06	0
TR11	0	0	0	0	0	0
TR12	0	0	0	0	0	0
TR13 (SQ) (UNSQ)	0 0	.62 .57	.08 .68	0	.14	.29
TR14 (SQ) (UNSQ)	0 0	.08 .68	4.68 .02	0	.29	4.66
TR15	0	.65	0	0	.65	0
TR16	9.56	1.78	8.73	1.06	1.70	4.13
TR17	0	0	0	0	0	0
TR18	8.83	9.44	14.16	8.79	9.44	13.10
TR19	8.99	8.82	.10	7.96	8.77	8.58
TR20	6.69	7.31	12.72	6.63	7.25	12.38
TR21	2.19	2.63	7.57	2.12	2.61	7.51
TR22	2.97	3.67	6.36	2.94	3.65	6.32
TR23	0	.66	2.38	0	.57	2.37
TR24	2.00	9.53	14.33	1.10	1.33	12.72
TR25	0	0	13.97*	0	.03	12.65*
TR26	0	0	13.97	0	.34	0

*(Voltages measured from opposite side if L11.)
 VOLTAGES MEASURED ON CHANNEL 9 at NO MODULATION.
 ANL-off / P.A.-off / RF GAIN-minimum / MIC GAIN-minimum / TONE-minimum / DELTA TUNE-minimum / S204-"BRITE" position.

PIN#	IC1		IC2		IC3	
	(RX)	(TX)	(RX)	(TX)	(RX)	(TX)
1	7.55	7.49	.10	2.71	14.33	14.05
2	3.22	3.21	0	2.00	3.01	2.96
3	.01	.02	0	1.25	0	0
4	7.20	7.07	0	2.62	.03	.05
5	3.79	3.68	0	0	1.82	1.82
6	3.79	3.68	.09	8.43	1.83	1.82
7	1.49	2.44	.09	2.14	0	0
8	.10	7.12	.09	4.81	0	0
9	3.51	3.50	.09	8.34	7.05	6.90
10	.51	.43			13.65	13.40
11	.50	.42				
12	.51	.44				
13	7.49	7.43				
14	7.49	7.43				
15	7.49	7.43				
16	7.49	7.43				
17	7.49	7.43				
18	0	0				